

Addendum #001

Quote Request # 07-12-22-01

Sidewalk Replacement at T.B. Watkins 1301 Vine St. KC MO 64106

Issue Date: July 21, 2022

The following addendum is hereby made a part of the Quote Request to the same extent as if it was originally included therein. The Contractor shall acknowledge in the bid the receipt of this Addendum.

The due date for Quote submission is extended to
Thursday August 4TH 2022 @ 2:00pm Central time

Quotes must be delivered at the offices of HAKC, located at 3822 Summit St. Kansas City, Mo. 64111 or submit electronically by sending E-mail to procurement@hac.org

2. Add the following scope of work as described on the next page.

ADDENDUM 1

Invitation for Bids
IFB # 07-0622-01.

Replace Trip Hazard Sidewalks at Theron B. Watkins Homes

More Locations: 917 thru 923 Woodland Ave. (Wayne Miner) added to initial scope.

July 21, 2022

Add the Followings to the Initial Scope of Works as described:

Sidewalk along 921 thru 923 Woodland Ave (Wayne Miner) to South Direction.

1. Furnish and install notification that indicated "Caution sidewalk Repair is in Progress" (City Required)
2. Saw cut, jackhammer, remove sidewalk concrete debris and haul
3. Cut tree roots as much as possible to allow spread 2" thick gravel base and 4" thick sidewalk.
4. Excavate, for 2" thick deep gravel and sidewalk thickness to match existed elevation
5. Form, furnish and spread 2" thick washed base gravels.
6. Drill existing concrete edge and insert 1/2" dia. Rebar dowels with epoxy as needed
7. Furnish and spread CIP, 6x6, W1.4xW1.4 expanded metal mesh.
8. Furnish and pour 3000psi sidewalk concrete to the areas where long sidewalk and sidewalk concrete entry were removed.
9. Finish sidewalk concrete to match existing pattern at the edge & construction tools
10. Furnish and apply concrete curing agent
11. Add 2" thick organic topsoil to all work areas including tire tracks on the lawn. Sow grass seeds and straws.
12. At 921 front step landing, cut & remove weak concrete where rebar exposed and neatly patch the edge to stop corroding & chipping again.
13. At 917, 2nd step nose or edge, cut-out and remove weak and corroded concrete where rebar would soon expose. Neatly patch the edge to stop corroding & chipping again.
14. One 8-1/2"x11" Architectural drawing showing the location, length and entire dimension of sidewalk to be added to the initial scope of work.
15. Pull permit from City Public Works for the sidewalk replacement, submit the Permit and Approval


General Requirements:

Contractor is liable for all materials installed until final inspection is conducted and accepted.

Total Duration:

Contractor shall have twenty-two (22) Calendar Days for this Contract.


921- 923 Woodland Ave. WAYNE MINER (to South direction)

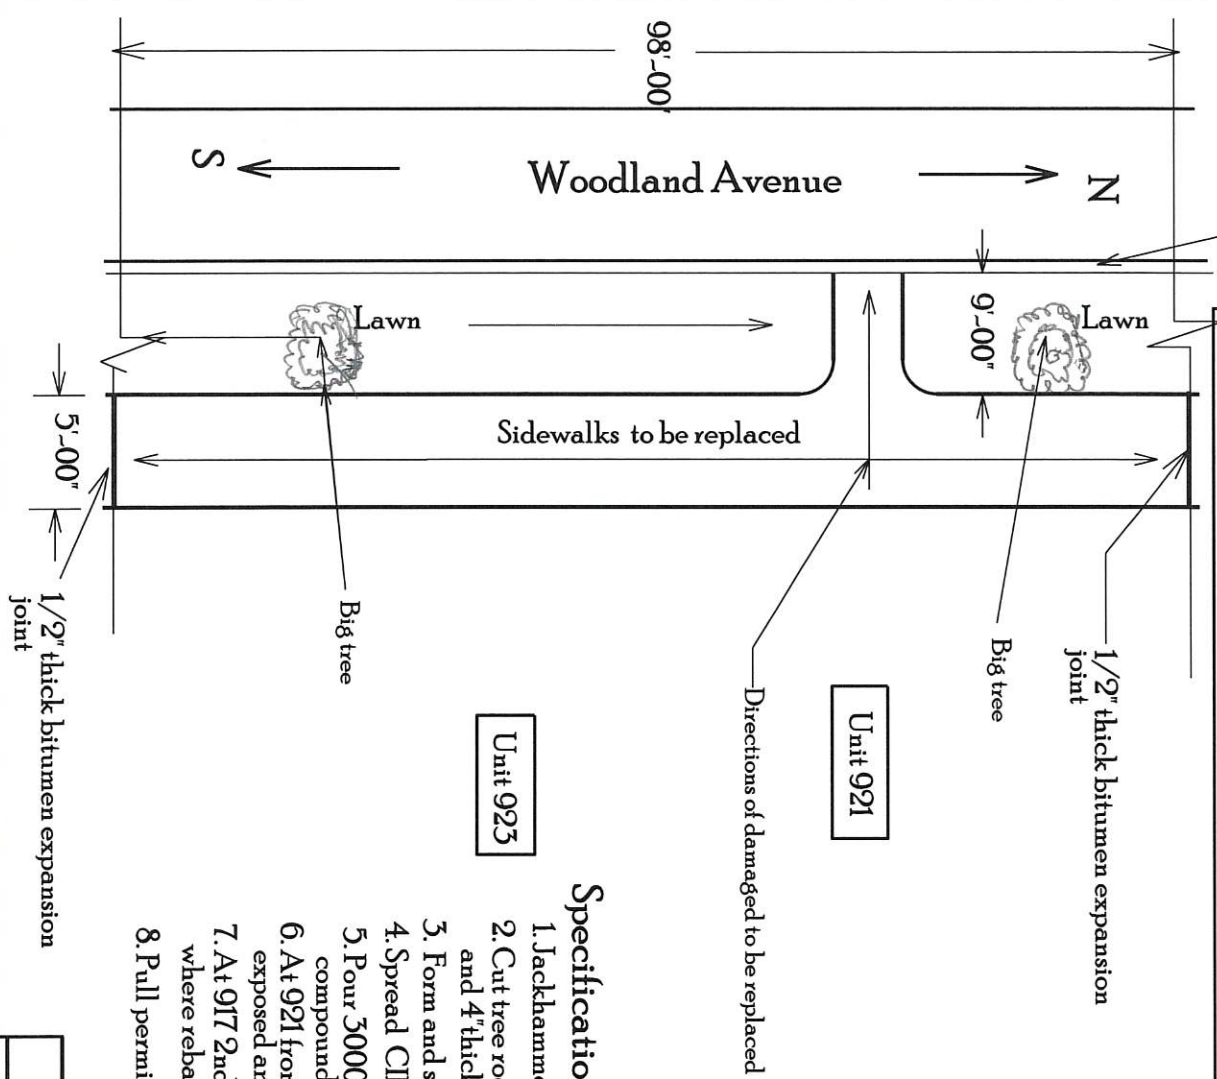

Specifications:

1. Jackhammer, remove sidewalk & excavate for gravel base & sidewalk
2. Cut tree roots as much as possible to allow spread 2" thick gravel base and 4" thick sidewalk
3. Form and spread 2" gravel base
4. Spread CP, 6x6, W1.4x W1.2 mesh and 1/2" dia dowels rebars
5. Pour 3000psi concrete Sidewalk & finish with concrete curing compound
6. At 921 front step landing, cut & remove weak concrete where rebar exposed and neatly patch the edge
7. At 917 2nd step nose or edge, cut out and remove weak concrete where where rebar is about to exposed and neatly patch the edge with the mortar
8. Pull permit from City Public work, submit the permit and approval

Replace Damaged Sidewalks: 7-20-2022

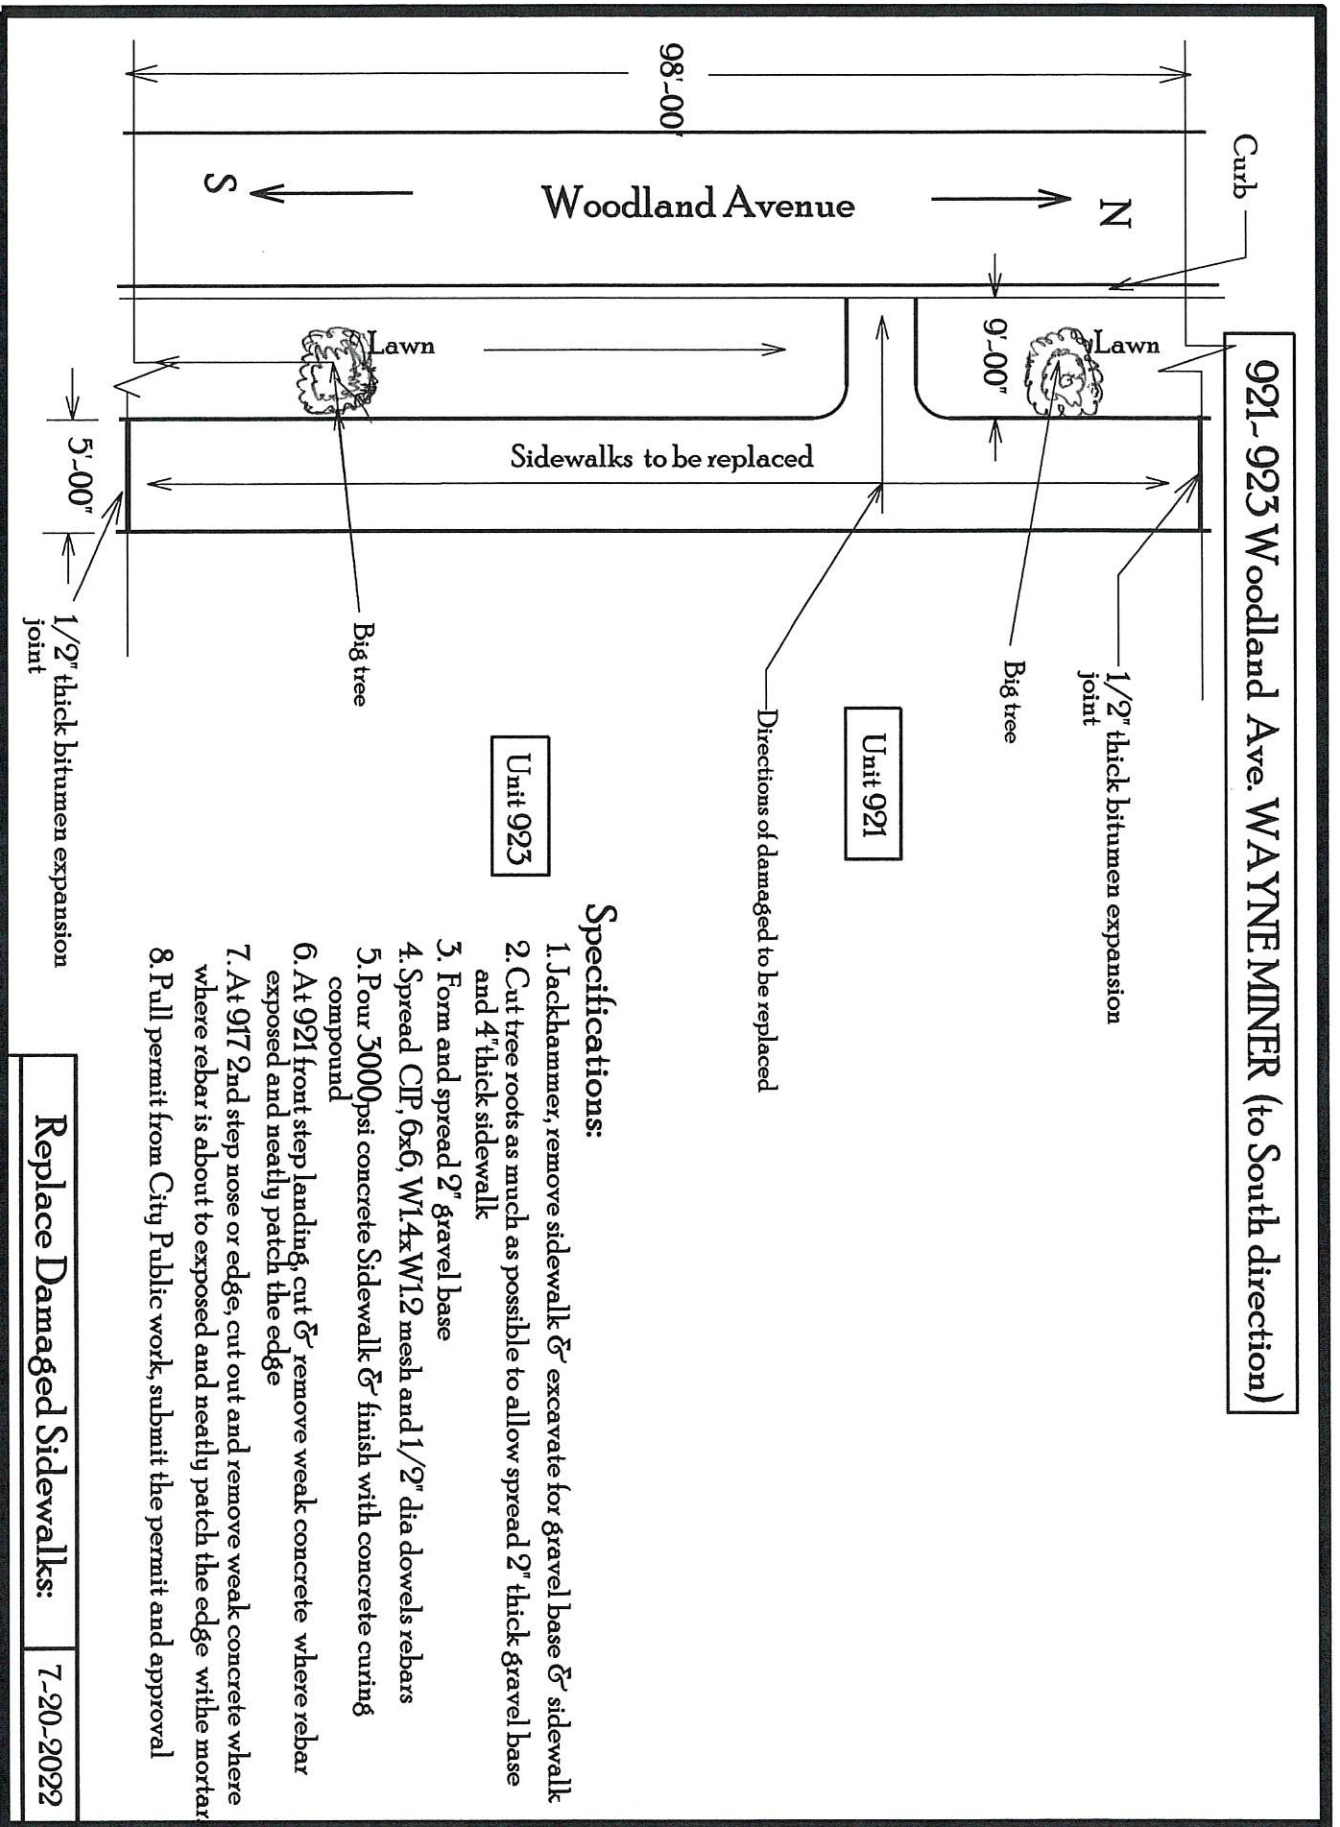

921- 923 Woodland Ave. WAYNE MINER (to South direction)

Unit 923

Unit 921

Specifications:

1. Jackhammer, remove sidewalk & excavate for gravel base & sidewalk
2. Cut tree roots as much as possible to allow spread 2" thick gravel base and 4" thick sidewalk
3. Form and spread 2" gravel base
4. Spread CP, 6x6, W14xW12 mesh and 1/2" dia dowels rebars
5. Pour 3000psi concrete Sidewalk & finish with concrete curing compound
6. At 921 front step landing, cut & remove weak concrete where rebar exposed and neatly patch the edge
7. At 917 2nd step nose or edge, cut out and remove weak concrete where where rebar is about to be exposed and neatly patch the edge with mortar
8. Pull permit from City Public work, submit the permit and approval

Replace Damaged Sidewalks: 7-20-2022

Quote Request # 07-12-22-01

Addendum #001

Sidewalk Replacement at T.B. Watkins 1301 Vine St. KC MO 64106

RECEIPT OF ADDENDA

Bidders shall return this form when submitting their bid. The form shall be signed and dated by an authorized representative of the firm. Failure to submit this form may deem the Bidder non-responsive.

We hereby acknowledge that the Addenda listed below has been received and all information has been incorporated into the Invitation for Bid .

Addendum #001 - Dated 7/20/2022

Date Received _____

Addendum

Date Received _____

Addendum

Date Received _____

Addendum

Date Received _____

Company Name _____ Date _____

Address/City/State/Zip _____

Authorized Signature _____ Printed Name _____

Telephone _____ Fax _____ Email _____

NOTE: THIS COVER PAGE MUST BE ATTACHED TO THE WRITTEN BID SUBMITTED